




# Jeep Grand Cherokee 4Xe PHEV 5⊞



Note: The Rescue Sheet depicts a LHD vehicle (as allowed under the ISO 17840-1. All components (other than steering wheel and passenger airbag) are located in the same in the Aust/NZ RHD model.

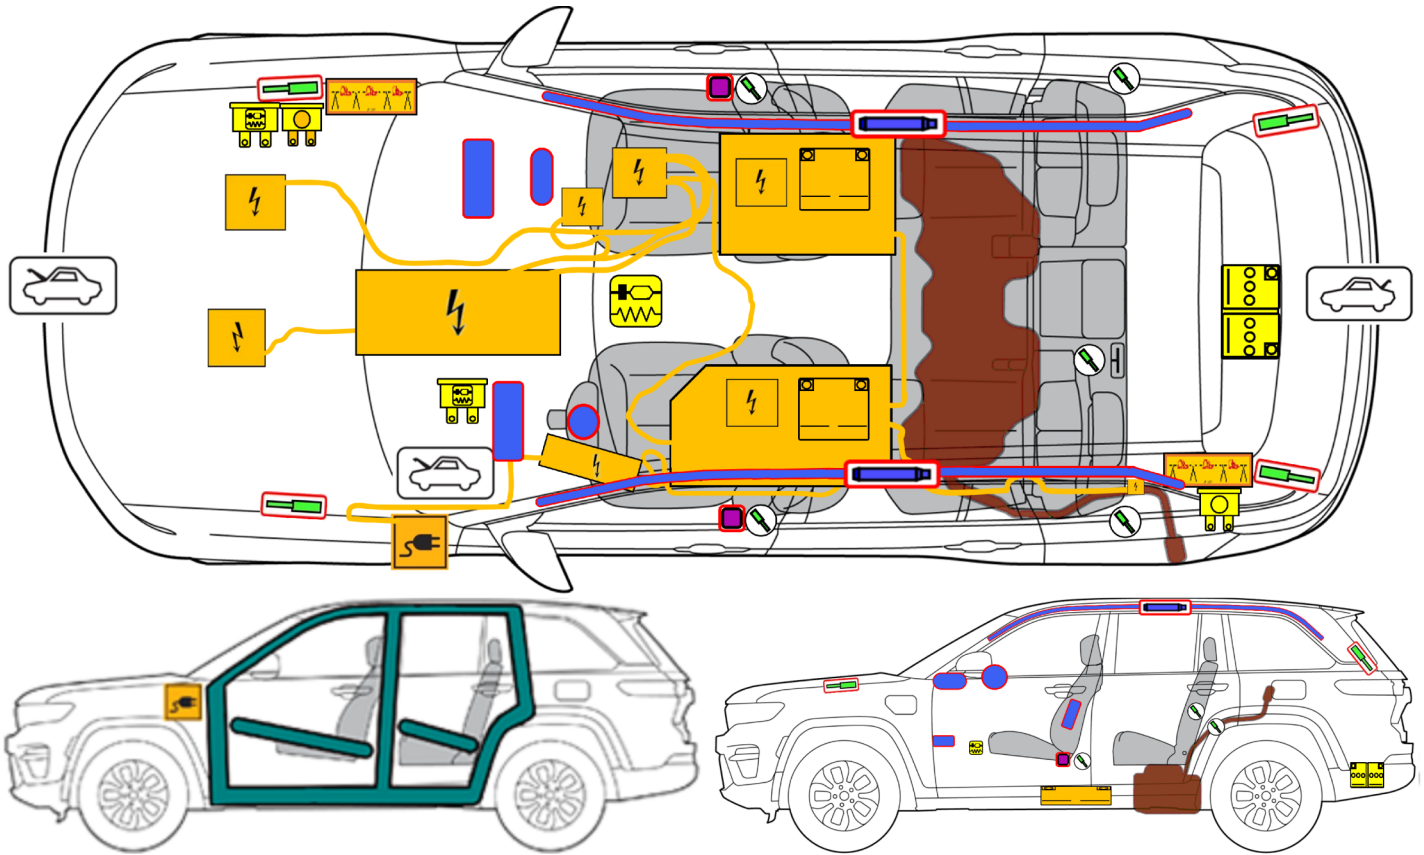

ISO 17840-1 PICTOGRAMS		OCUPANT/CURTIAN/BOLSTER AIR BAG AND INFLATOR		AIR BAG INFLATOR		SEATBELT PRETENSIONER		AUTOMATIC ROLL-OVER PROTECTION
		PEDESTRIAN PROTECTION DEVICE		RESTRAINT SYSTEM CONTROL MODULE		HIGH STRENGTH ZONE		ZONE REQUIRING SPECIAL ATTENTION
		LOW VOLTAGE BATTERY		FUEL TANK		COMPRESSED GAS TANK		SAFETY VALVE COMPRESSED GAS CONTROL VALVE
		HIGH VOLTAGE BATTERY PACK		HIGH VOLTAGE DISCONNECT		LOW VOLTAGE FUSE BOX DISABLING HIGH VOLTAGE		HIGH VOLTAGE ULTRA-CAPACITOR
ISO 17840-3 AND OTHER PICTOGRAMS		ENGINE ACCESS LATCH TRUNK/CARGO		VEHICLE CHARGE PORT		VEHICLE INDUCTION CHARGING		RESPONDER CUT-LOOP
		DISCONNECT HIGH VOLTAGE VIA LOW VOLTAGE				HIGH VOLTAGE COMPONENT		FUEL TANK WITH DIESEL FUEL
		FUEL TANK WITH GASOLINE OR ETHANOL				LOW VOLTAGE FUSE BOX		LOW VOLTAGE FUSE BOX DISABLING SRS

**WARNING:** Lack of engine noise does not mean vehicle is off: vehicle movement capability exists until vehicle is fully shut down.

Always wear appropriate high voltage and turn-out PPE when addressing a damaged Jeep Grand Cherokee 4Xe Hybrid.

High voltage components may remain energized even after following the steps in this sheet.

## 1. Identification / recognition

Badge rear lift gate left corner:



Hybrid Drive Mode Selection Switch left of steering column:



Charging port door driver's side:



Charge status indicator at center dash above LCD display:



## 2. Immobilization / stabilisation / lifting


1. Set ignition to "RUN" or "ACC"
2. Place Shifter in Park (rotate counter clockwise)
3. Set Parking Brake by pulling Up on bottom of switch



Recommended Lift Points:

**WARNING:** In some cases, vehicle damage may result in wheel rotation generating high voltage power.


**WARNING:** Transfer case Neutral over-rides PARK allowing free movement.

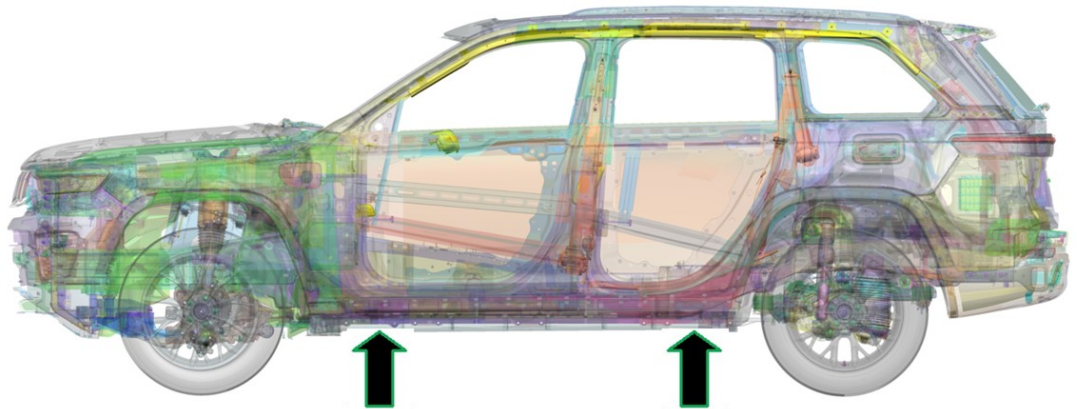

## 3. Disable direct hazards / safety regulations

MAIN METHOD

1. Unplug from any charging equipment
2. Set Ignition to OFF
3. Move key fob at least 20 feet away
4. Open hood
5. Cut a segment of cable away at the responder cut tape



This disables high voltage and some low voltage including restraints

TO DISABLE REMAINING LOW VOLTAGE

1. Open lift gate
2. Remove access cover from trim panel
3. Cut a segment of cable away at the responder cut tape



Wait 5 minutes after depowering for high voltage capacitors to drain. Always treat all high voltage components as if live, as the methods above can fail in cases of battery

#### 4. Access to the occupants


Do not cut into any hazards depicted on page 1. Also avoid cutting fuel, brake & coolant tanks/lines

Recommended cut points:

Laminated Glass: Windscreen, front door and rear door front.

Tempered Glass: Rear door rear, quarter, lift gate and sunroof.

Do not cut into restraint system (belts only may be cut with a knife)

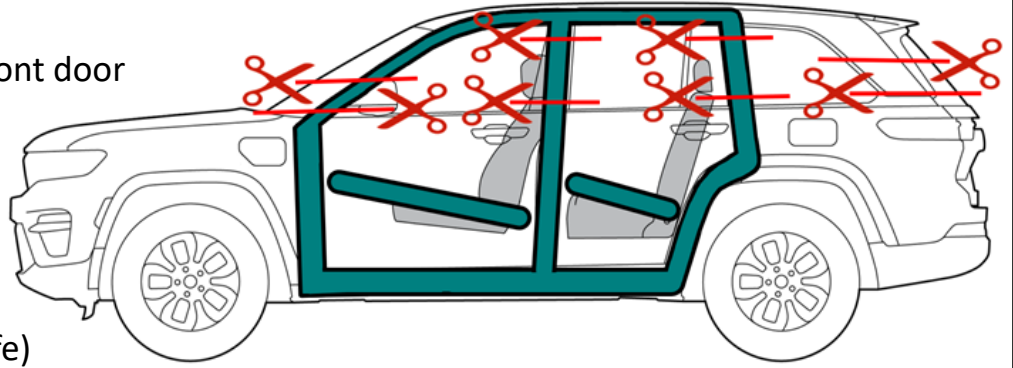


#### 5. Stored energy / liquids / gases / solids

High voltage energy should be contained to within the Lithium-ion battery pack when possible. Do not discharge.


WARNING: The fuel system is pressurized.

WARNING: Magnesium alloy- Steering wheel, instrument panel crossbeam and rear swing gate.

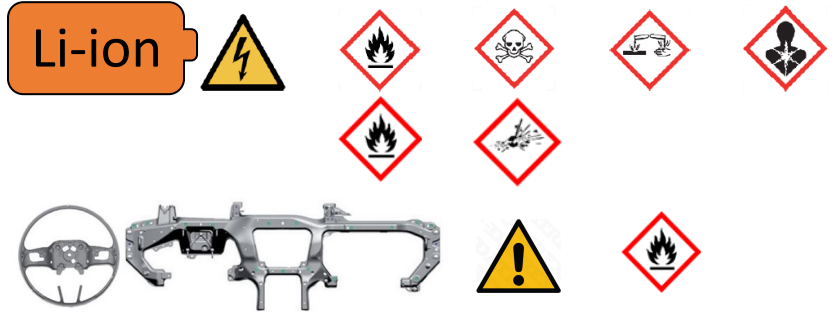

#### 6. In case of fire

Do not cut into any hazards depicted on page 1. Also avoid cutting fuel, brake & coolant tanks/lines

 Apply large amounts of water at first sign of thermal activity. Misting is not recommended.



WARNING: Gaseous emissions from a thermally active damaged lithium-ion battery include hydrogen, which is explosive when mixed with oxygen in the air.



WARNING: Gaseous emissions from a thermally active lithium-ion battery include hydrogen fluoride which when combined with moisture in the human body forms an acid that can cause burns, respiratory distress and injury, blindness and/or death.




Immediately open all doors and remove all glass to maximize ventilation.


  WARNING: Delayed ignition or re-ignition is possible. Monitor for thermal activity throughout response operations with an infrared thermometer or equivalent.



#### 7. In case of submersion

With a Grand Cherokee 4Xe that is without physical damage (such as from an accident) the risk of electrical shock when submerged or flooded is not increased.

 A vehicle with impact damage presents an increased electrical shock hazard risk. If HV is open to the environment you must stay away from damaged HV components.

 In salt water, chlorine may be produced in concentrations that could be corrosive and could have adverse effects on human health.



#### 8. Towing / transportation / storage

POST-INCIDENT DELIVERY TO SERVICE: If air bags have deployed, the vehicle cannot be driven again until repaired, as air bag protection will not be available to occupants in the event of a collision. After any collision, the vehicle should be taken to an authorized dealer immediately.

WARNING: If the transfer case is in Neutral, the car will roll regardless of transmission setting.

## 8. Towing / transportation / storage

### Towing Instructions:

1. Place car in PARK, with brake on
2. Transport on flatbed or trailer ONLY
3. Drag vehicle onto flatbed or trailer
4. Secure fully to conveyance
5. At location, drag off conveyance
6. Leave vehicle in PARK with brake set
7. Chock wheels if not secured otherwise



DO NOT PUSH



DO NOT TOW WITH WHEELS ON GROUND



FLATBED ONLY

**WARNING:** Rotation of wheels may result in generation of high voltage or unexpected propulsion.



Monitor for thermal activity/fire throughout transport and storage. Store away from other vehicles, outside, and away from air inlets to occupied structures.

### Collect spilled fluids for disposal as follows:

Collect spilled engine coolant and any coolant from electronic systems in the normal manner for spilled glycol/water mix.

Collect spilled engine and hydraulic oil with absorbent material, and use detergents to recover from masonry. Collect contaminated ground for disposal in accordance with local requirements as applicable.

Collect spilled gasoline in the same manner as oils, but employ precautions for the management of flammable and explosive vapors.

Collect spilled 12 V battery electrolyte with an absorbent that neutralizes the highly acidic sulfuric acid electrolyte. Do not handle 12 V battery electrolyte, or materials contaminated with 12 V battery electrolyte without chemically resistant protection.



All debris should be collected and disposed of in an environmentally appropriate manner. Skin contact with battery pack internals is to be avoided. Leakage of electrolyte from the Li-ion battery is unlikely. Any leaking battery fluids are likely glycol-water coolant.

## 9. Important additional information

Stellantis / FCA US Customer Center: (877) 426-5337  
 Stellantis / FCA Canada Customer Center: (800) 465-2001 (English) (800) 387-9983 (French)  
 Stellantis / FCA Mexico Customer Center: +(52) 55 50817568  
 Stellantis / FCA within Mexico City only: (800) 505-1300  
 Stellantis / FCA Caribbean Customer Center: (877) 426-5337

This brochure is a publication of FCA US LLC. All product illustrations and specifications are based upon current information at the time of publication approval. FCA US LLC reserves the right to make changes from time to time, without notice or obligation, in prices, specifications, colors and materials, and to change or discontinue models, which are considered necessary to the purpose of product improvement or for reason of design and/or marketing.

## 10. Explanation of pictograms used

	GASOLINE-ELECTRIC VEHICLE		IMPORTANT INFORMATION		ELECTRICAL SHOCK HAZARD
	RISK OF FIRE		RISK OF EXPLOSION		HARMFUL OR LETHAL TO HUMAN HEALTH
	CORROSIVE SUBSTANCE		RISK OF INJURY		LITHIUM-ION BATTERY—HANDLE APPROPRIATELY
	DO NOT PUSH VEHICLE		RELOCATE KEY FOB AWAY FROM VEHICLE		RISK OF THERMAL ACTIVITY FROM BATTERY SYSTEM
	FLATBED/TRAILER TOW ONLY		DO NOT TOW WITH WHEELS ON GROUND		USE LARGE AMOUNTS OF WATER